


KB-SERIES

MULTIFUNCTION OVERLOCK FLANGING MACHINE

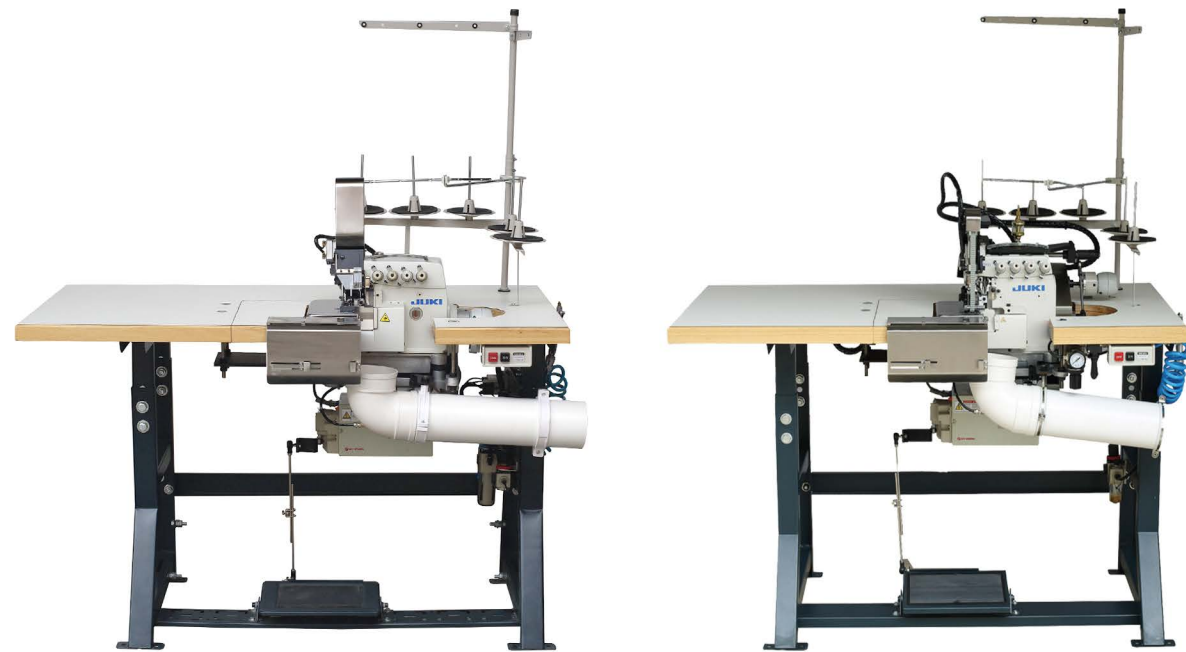

Product Characteristic

- Over-locked and sewn-up together simultaneously.
- The sensitive and convenient automatic flange cutter.
- The new designed upper and down feeding system.
- Smart and convenient automatic upper positioning sensor.
- High-efficiency stepless speed regulation motor.
- Additional new functions, air gun cleaner, waste material collection rail and new working table design.

USAGE SCENARIOS



HO Hsing Motor



Discharge Pipe



KB1A



KB3K



KB4



KB4A



KB6A

Technical Parameters

Model	KB1A	KB3K	KB4	KB4A	KB6A
Max Sewing Thickness	60mm	70mm	70mm	80mm	90mm
Type of Sewing Head	Re-model of domestic head	KINGTEX	JUKI 6900---6916	PEGASUS	JUKI 6900
Press Foot Lift	12mm	15MM	15mm	15mm	35mm
Number of Sewing Threads	4thread	4thread	5thread	4thread	5thread
Feeding method	Pressfoot	Pressfoot	Belt	Pressfoot	Belt
Motor Power	600w	550W	550w	550w	750W
Flanging Width	25mm	15/25/30/35mm	25mm	15/25/30mm	25mm
Air Pressure	0.4-0.8Mpa	0.4-0.8Mpa	0.4-0.8Mpa	0.4-0.8Mpa	0.4-0.8Mpa
Needle Bar Type	Double bar	Double bar	Double bar	Double bar	Double bar
Max Sewing Speed	3000rpm	3000rpm	3000rpm	3000rpm	4500rpm