


YS-64"-96"-128"

COMPUTERIZED SHUTTLE MULTI-NEEDLE QUILTING MACHINE

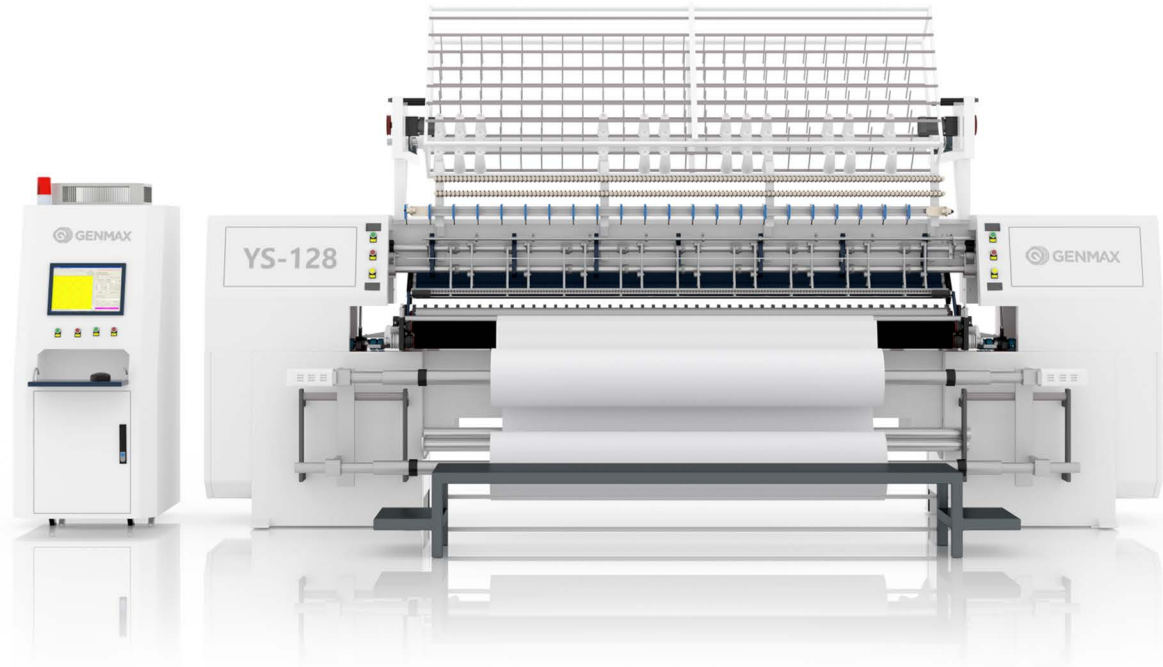

Product Characteristic

- It is widely used for quilting high-quality garments, quilt covers,hand bags, gloves,sleeping bags, pajamas,bed spreads,seat covers, plus material and household ornaments.
- Advanced computer control system and mechanical manufacturing process reduce machine noise
- Pattern drawing is easy to learn and there are many patterns to choose.
- 7#-10#specifications models can be customized.
- Pattern compensation function solves the problem that there may be something wrong with the shape of the patterns when the material is too thick.

QUILTING MACHINE



QUILTING PATTERNS





SHUTTLE QUILTING MACHINE AND FILLING COMPOSE PRODUCTION LINE



1. Automatic feeding and opening machine	2. Filling fiber cotton machine	3. Flat Carding Cotton Machine	4. YS Computerized shuttle multi-needle quilting machine	5. C14A Cutting machine
FT-3000				

Unit:mm

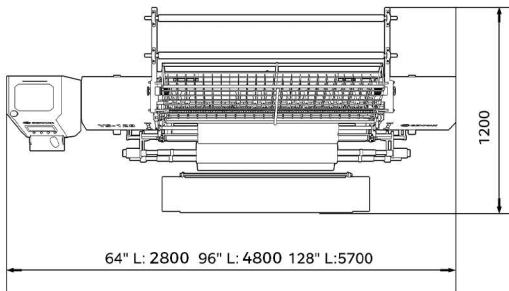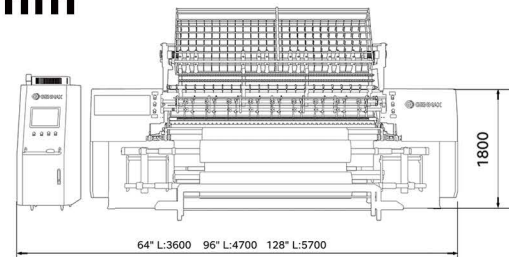

Technical Parameters

Model	GM-YS-64"-3-4.5/5/6	GM-YS-96"-3-5/6	GM-YS-128"-2-3/6
Dimension(L*W*H)(mm)	3800*1200*1800	4800*1200*1800	5700*1200*1800
Quilting Width(mm)	1650mm	2450mm	3300mm
The Number of Needle Rows	3	3	2/3
Space Between Needle Rows	3"+1.5"/3" +2"/3"+3"	3"+2"/3"+3"	3"/3" +3"
Space Between Needle	19.05/25.4mm	25.4mm	25.4mm
X-axis Movement Displacement	228.6mm/228.6mm/304.8mm	304.8mm	254/304.8mm
Thickness of Quilting	25mm	25mm	25mm
Stitch Length	2-12mm	2-12mm	2-12mm
Speed of Operation(m/hour)	20-200	20-200	20-200
Model of Needle	16#、19#	16#、19#	16#、19#
Quilting Speed(r/min)	100-1000	100-1000	100-1000
Voltage(AC)	380/220V , 3P , 50/60Hz	380/220V , 3P , 50/60Hz	380/220V , 3P , 50/60Hz
Total Power	3.5KW	5.5KW	7.5KW